ClearOne. Aura⁻

With Aura, Professionals can now Re-imagine their Workspaces at Home

UNITE® 50 4K ePTZ Camera



Experience full 4K resolution and an ultra wide-angle field-of-view for professional quality visual collaboration in huddle spaces at an affordable price . Combine with your choice of microphone and speaker for an exceptional collaboration experience.

Aura Professional Home Office Solution

Dramatically enhances the audio and video experience for any cloud-based collaboration application for your professional home office

COMPATIBLE WITH



— Enhance Your Cloud Collaboration -

ClearOne


Highlights

- + 4K video, auto-focus, and 3x digital zoom.
- + 120° ultra-wide angle field-of-view.
- + Wide dynamic range support for optimal image capture.
- + Super-high SNR with advanced 2D and 3D noise reduction.
- + Full-function USB 3.0 interface for video and power.
- + Control the camera's functions via IR remote or UVC protocol.

- + Easily mounted on monitors using standard damping rotary-shaft support.
- Compatible with popular applications such as COLLABORATE[®] Space, Microsoft[®] Teams, WebEx[™], Zoom[™], Google[®] Meet[™], and more.
- + FREE COLLABORATE® Space lifetime subscription ClearOne's high quality, award winning cloud-based video collaboration application.

Aura Professional Home Office Application

Complete your UNITE® 50 4K ePTZ Camera setup by adding other ClearOne Aura products

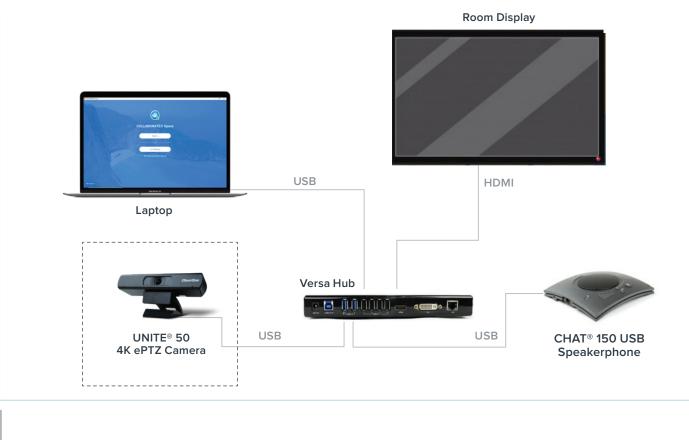



Specifications

+ AUR-2100-006 UNITE® 50 4K ePTZ Camera

INCLUDES

+ Free COLLABORATE® Space lifetime subscription

VIDEO

- + VIDEO FORMATS: 4K30, 1080p30, 1080p25, 720p30, 720p25, 960x540p30, 960x540p25, 640x360p30, 640x360p25, etc.
- + 4K: down-compatible with 1080p30 and 720p
- + Sensor: 1/2.5", CMOS, Effective pixel: 8.29M
- + Scanning mode: Progressive
- + Lens: Focus: f=2.8 mm, FOV: 120°
- + Minimal illumination: 0.05 Lux @ (F1.8, AGC ON)
- + Shutter: 1/30 s 1/10000 s
- + White balance: auto, indoor, outdoor, One-push, manual
- + Backlight compensation: Supported
- + Digital Noise Reduction: 2D & 3D
- + Horizontal angle of view: Wide angle up to 120°
- + Electronic Pan Tilt Zoom
- Installation: Equipped with damping rotary shaft bracket to fit almost any display

AUDIO

+ Built-in microphone array

COMPATIBILITY

- + Operating Systems: Windows 7, Windows 8, Windows 8.1, Windows 10, Mac OS, Linux
- + USB video communication: UVC 1.0/1.1 UVC PTZ: Supported

INPUT/OUTPUT INTERFACE

+ USB interface: 1xUSB 3.0: Type B, female

POWER

- + Input voltage: 5 V (USB power supply)
- + Current consumption: 600 mA
- + Power consumption: 3.0 W

ENVIRONMENTAL

- + Operating temperature: 14° F ~ 104° F (-10° C ~ 40° C)
- + Storage temperature: -40° F ~ 140° F (-40° C ~ 60° C)
- + MTBF: >30000h

MECHANICAL

- + Dimensions (W x D x H): 7.64 x 1.34 x 1.65" (194 x 34 x 42 mm) (without bracket)
- + Weight: 0.74 lb (0.34 kg)

OPTIONAL ACCESSORIES

+ 910-3200-702-30 USB 3.0 cable

Sales & Inquiries -

Headquarters

5225 Wiley Post Way Suite 500 Salt Lake City, UT 84116

Headquarters US: +1.801.975.7200 International: +1.801.975.7200

Aura Sales

US: +1.888.HEY.AURA International: +1.801.975.7200 aurasales@clearone.com

Aura Tech Support

US: +1.888.HEY.AURA International: +1.801.975.7200 auratechsupport@clearone.com

Other product names and logos may be registered trademarks of their respective owners who do not necessarily endorse ClearOne or ClearOne's products. All rights reserved. Information in this document subject to change without notice. DST-0138-001 Rev3.8 20220224 ©2022 ClearOne.