

ClearOne® Aura™

With **Aura**,
Professionals can
now **Re-imagine**
their **Workspaces**
at **Home**



Versa Pro 150



Includes ClearOne's CONVERGE® Huddle CT audio processor, UNITE® 150 12x optical zoom PTZ HD camera, and a 360-degree coverage ceiling mic array for professional audio and video in your home office.

Aura Professional Home Office Solution

Dramatically enhances the audio and video experience for any **cloud-based collaboration** application for your **professional home office**

COMPATIBLE WITH




Enhance Your Cloud Collaboration

Highlights

- ✦ CONVERGE® Huddle CT audio for a professional audio experience.
- ✦ Ceiling Microphone Array with 360-degree coverage reducing noise and reverberation.
- ✦ UNITE® 150 PTZ HD camera with 1080p30 and 12x optical zoom for high video quality no matter where the camera is installed in your home office.
- ✦ Configure Versa Pro CT directly through the USB port, or use network Ethernet jack.
- ✦ Add pro-quality audio and HD video to your app, such as COLLABORATE® Space, Microsoft® Teams, WebEx™, Zoom™, Google® Meet™, and more.
- ✦ FREE COLLABORATE® Space lifetime subscription — ClearOne's high quality, award-winning cloud-based video collaboration application.
- ✦ Add the Bluetooth Wall Panel to make this system smart speaker ready. Supports Alexa, Cortana, Google Home, and Siri.

Aura Professional Home Office Application

Complete your **Versa Pro 150** setup by adding other ClearOne Aura products

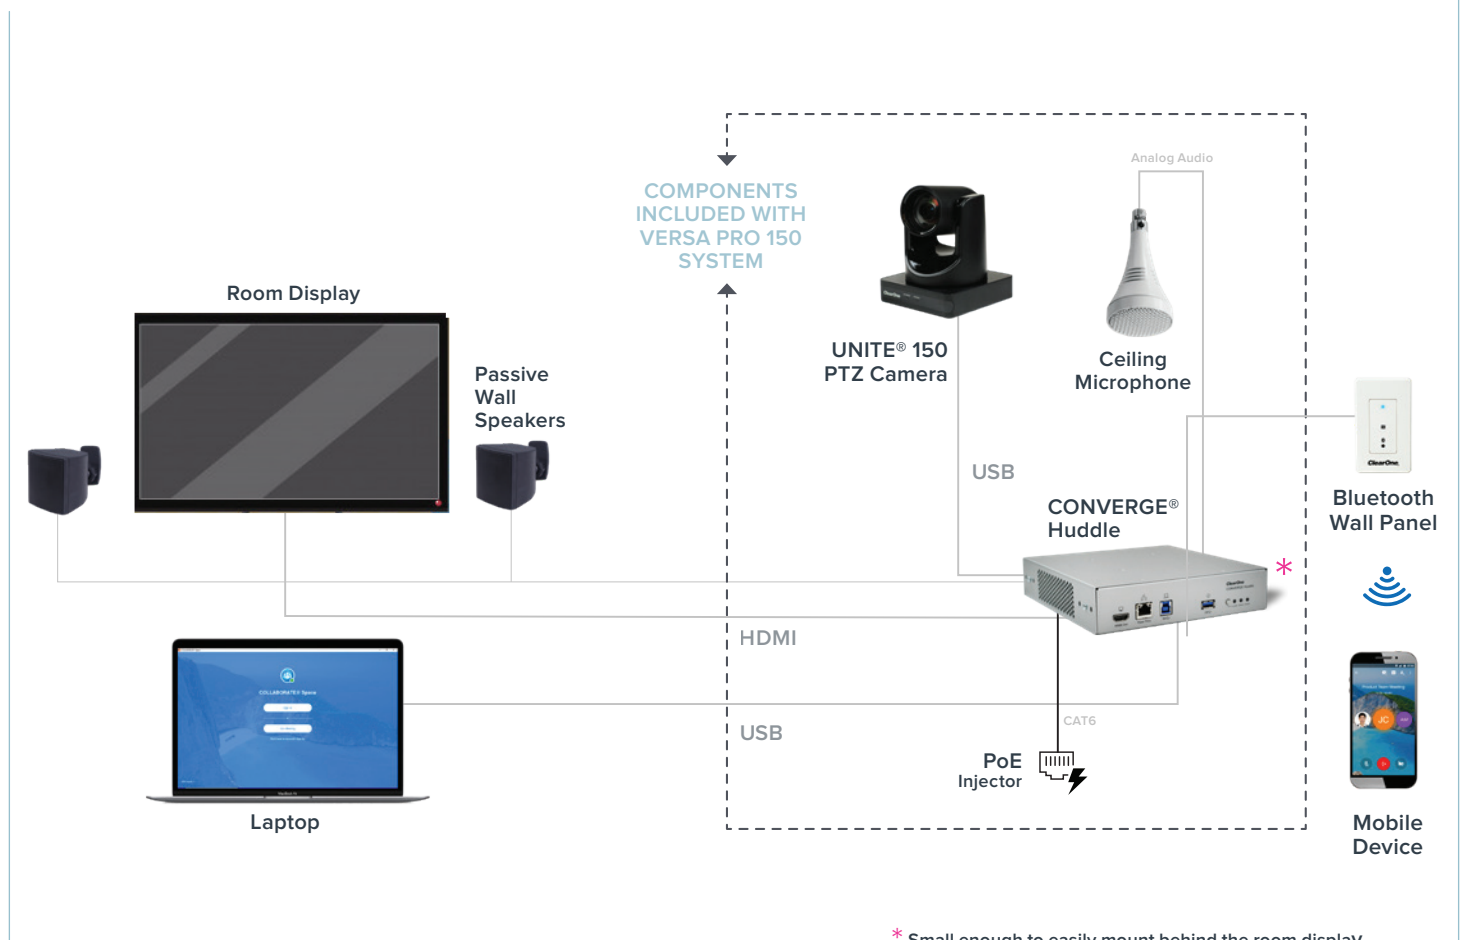

Specifications

† AUR-3200-150 VERSA Pro 150

INCLUDES

- † AUR-3200-701 CONVERGE® Huddle
- † AUR-2100-004 UNITE® 150 USB PTZ HD camera
- † AUR-001-013-W Ceiling Mic Array (White)
- † AUR-3200-202 PoE Injector Kit
- † Free COLLABORATE® Space lifetime subscription

CONVERGE® HUDDLE CT

- † INPUT/OUTPUT INTERFACE
 - INPUTS
 - 3-channel balanced mic/line inputs with AEC
 - 1 channel balanced line input without AEC
 - 3.81 mm orange-color Phoenix/Euroblock type push-on mini-terminal block
 - LINE OUTPUTS
 - 2-channel balanced line outputs, 3.81mm black-color Phoenix/Euroblock type, push-on mini-terminal block
 - USB CONNECTIONS
 - 1 USB 3.0 Type-B
 - 1 USB 3.0 Type-A
 - RJ-45, 10/100/1000Mbps, passthrough to USB-B 3.0
- † VIDEO FORMATS
 - 1600 x 1200p @ 60Hz, 4:3 ratio
 - 1920 x 1200p @ 60Hz, 16:10 ratio
 - 2560 x 1440p @ 60Hz, 16:9 ratio
- † ENVIRONMENTAL
 - Thermal: 116 BTU/Hr Typical
 - Operating Temperature: 14° F to 104° F (-10° C to 40° C) Ambient Temperature
- † AMPLIFIER OUTPUT
 - Type: 5.08 mm Black Phoenix type, Euroblock
 - Audio: 2 Channels
 - Output Power: 10 W Max, 8Ω load
 - Frequency Response: 20 Hz – 22 kHz @ 10 dBu, +/- 0.5 dBu
 - THD + N (Total Harmonic Distortion + Noise): 20 Hz – 22 kHz @ 10 dBu, 1 W, <0.3%
 - Dynamic Range: 20 Hz – 22 kHz @ 20 dB, >102 dB with 20kHz digital low pass filter
 - Crosstalk (Mic/Line): Channel-to-Channel, stimulus at 20 dBu to receptor, < -70 dB

† MECHANICAL

- Dimensions (WxHxD): 7.52 x 7.83 x 1.73” (191 x 199 x 44 mm)
- Unit Weight: 2.9 lb (1.32 kg)

CEILING MICROPHONE ARRAY

- † ACOUSTIC CHARACTERISTICS
 - Polar Pattern: Cardioid
 - Dynamic Range: 80 dB, 1 kHz @ max SPL
 - Signal/Noise Ratio: 60 dBA, 1kHz @ 1Pa
 - Frequency Response: 100 Hz - 12 kHz
 - Sensitivity: 114 mV/Pa
- † ELECTRICAL CHARACTERISTICS
 - Element: Fixed-charge back plate permanently polarized condenser
 - Phantom Power Requirement: 12-52 vdc, 2 mA typical
 - Impedance: 200 Ω

UNITE 150 PTZ HD CAMERA

- † VIDEO FORMATS: 1080p30, 1080p25, 720p30, 720p25
- † Sensor: 1/2.7 inch, CMOS
- † Effective Pixel: 2.07M
- † Scanning Mode: Progressive
- † Lens : 12x, f3.5 mm – 42.3 mm, f1.8 – f2.8
- † Minimal Illumination: 0.5 lux @ (f1.8, AGC ON)
- † Shutter: 1/30 S – 1/10000 S
- † White Balance: Auto , Indoor, Outdoor, One Push, Manual
- † Backlight Compensation: Supported
- † Digital Noise Reduction: 2D & 3D
- † Video S/N: ≥55 dB
- † Horizontal Angle of View: 72.5° – 6.9°
- † Vertical Angle of View: 44.8° – 3.9°
- † Horizontal Rotation Range: ±170°
- † Vertical Rotation Range: -30° – +90°
- † Pan speed range: 1.7° – 100°/S
- † Tilt Speed Range: 1.7° – 69.9°/S
- † H & V Flip: Supported
- † Image Freezing: Supported
- † Number of Presets: 255
- † Installation: Stand Mount, upside-down mount

Specifications

(UNITE 150 PTZ HD CAMERA continued)

† INPUT/OUTPUT INTERFACE

Audio Interface: 1-CH 3.5 mm Audio Interface, Line In
USB Interface: 1 x USB3.0: type B Female jack
Communication: 1 x Rs-232 in : 8-Pin Min din, Max distance: 30 m, Protocols: VISCA/Pelco-D/Pelco-P
1x RS-232 Out: 8-Pin Min din, Max distance: 30m, Protocols: Visca network use only

† COMPATIBILITY

- Operating Systems: Windows 7, Windows 8, Windows 8.1, Windows 10, MAC OS, Linux
- Color System: YUV 4:2:2
- USB 2.0: 720P30 maximum
NOTE: Use of USB 2.0 downgrades video quality.
ClearOne does not recommend using USB 2.0 extenders.
- USB Video Communication: UVC 1.0 - UVC 1.5
- Audio on USB: Supported
- UVC PTZ: Supported

† POWER

- Power Jack: JEITA type (DC In 12V)
- Input Voltage: DC 12V
- Current Consumption: 1.0 A (max)
- Power Consumption: 12 W (max)

† ENVIRONMENTAL

- Operating Temperature: +14° F–104° F (-10° C – 40° C)
- Storage Temperature: -40° F – 140° F (-40° C – 60° C)
- MTBF: >30000h

† MECHANICAL

- Dimensions (W x D x H): 5.67 x 5.67 x 6.61”
(144 x 144 x 168 mm)
- Weight: 2.0 lb (0.9 1kg)
- Remote control, USB (UVC), RS-232

OPTIONAL CLEARONE PERIPHERALS

- † AUR-3200-303 Bluetooth Wall Panel
- † AUR-151-010-B Passive Wall Speakers
- † AUR-3200-204-50 RJ45 CAT6 Cable – 50’
- † 910-3200-702-30 USB 3.0 Cable – 33’
- † 693-153-050 Speaker Cable – 50’

Sales & Inquiries

Headquarters

5225 Wiley Post Way
Suite 500
Salt Lake City, UT 84116

Headquarters

US: +1.801.975.7200
International: +1.801.975.7200

Aura Sales

US: +1.888.HEY.AURA
International: +1.801.975.7200
aurasales@clearone.com

Aura Tech Support

US: +1.888.HEY.AURA
International: +1.801.975.7200
auratechsupport@clearone.com