


# CONVERGE® Wall-Mount Bluetooth Expander

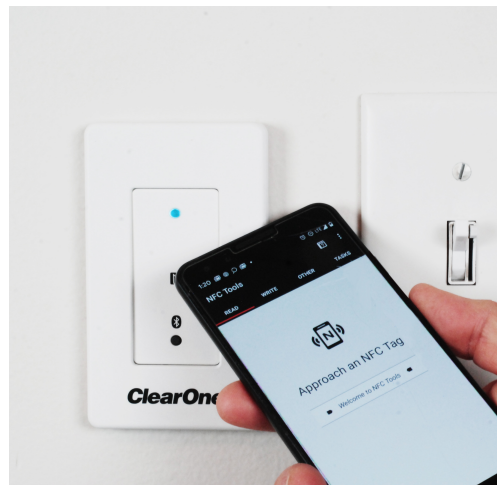

The Wall-Mount Bluetooth Expander enables Bluetooth audio conferencing and streaming from mobile devices to ClearOne's CONVERGE Pro 2 and Huddle audio DSP's.

### Connect Fast with "Tap-to-Pair"

NFC Tap-to-Pair allows fast and simple connectivity with mobile devices.

- > Bluetooth pair name can be customized.
- > Bluetooth 3.0 compliant interface supports industry standard profiles for audio.
- > P-Link\* makes wiring easy on both CP2 and Huddle systems
- > Has great range – up to 150 feet (45 meters).
- > Wall-mount design for convenient room access (single-gang electrical box).

\* Modified P-Link for Huddle connections

### APPLICATIONS:

- Audio conferencing
- Video conferencing
- BYOD conferencing
- Web conferencing

### WORKSPACES:

- Boardrooms
- Conference rooms
- Huddle and BYOD workspaces
- Training centers
- Lecture halls
- Multi-purpose rooms
- Offices



### Great Room Range

Has great range – up to 150 feet (45 meters).

*Great Ideas Need to be Heard™*

# CONVERGE<sup>®</sup> Wall-Mount Bluetooth Expander

**BLUETOOTH WIRELESS TECHNOLOGY**

- Version: 3.0
- Mode: Bluetooth Classic
- Supported Profiles
  - Hands-Free Profile v1.6 (HFP)
  - Distribution Profiles v1.5 (A2DP, AVRCP)
- Supported Codec
  - Default SBC (44.1kHz) do not list on datasheet, other upon request. Hands-Free Profile v1.6 (HFP)
- Wireless Performance
  - Frequency Band: 2390 MHz to 2483.5MHz
  - Transmit Power: +6.5dBm
  - Receiver Sensitivity: -90dBm3
  - Wireless Range: Up to 150 feet (45 meters)

**INDICATORS AND MOMENTARY SWITCH**

- LED
  - Blinking Blue - Ready to Pair
  - Solid Blue - Paired
- Toggle Switch
  - Press to reset Bluetooth - break Bluetooth connection and set into pairing mode.

**P-LINK IN (PROPRIETARY NETWORK)**

- RJ45: Cat5e, Cat6, P-Link In only
- Cable Length: 200ft (test up to 250 ft)

**POWER CONSUMPTION**

- P-Link In, RJ45
- 2.24 Watt

**THERMAL**

- 7.64 BTU/Hr

**OPERATING TEMPERATURE**

- 14°F/-10°C to 104°F/40°C

**DIMENSIONS**

- 1.7" x 4.4" x 1.6" (44 mm x 112.5mm x 40mm)

**WEIGHT**

- Product weight: .19 lbs (88g)
- Shipping weight: .35 lbs (.16kg)

**COMPLIANCE**

- This device complies with part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.
- FCC ID: QOQWT32I
- IC: 5123A-BGTWT32I
- MIC ID: 209-J00089
- KCC: MSIP-CRM-BGT-WT32I

**PART NUMBER**

910-3200-303

**SALES AND INQUIRIES****Headquarters**

5225 Wiley Post Way  
Suite 500  
Salt Lake City, UT 84116

**US & Canada**

Tel: +1.801.975.7200  
Fax: +1.801.303.5711

**International**

Tel: +1.801.975.7200  
global@clearone.com

**Sales**

Tel: +1.801.975.7200  
sales@clearone.com

**TechSupport**

Tel: +1.801.974.3760  
tech.support@clearone.com